

## TC-7 Carrying Case




TC-7 Carrying Case

The TC-7 is a case specially designed for the Sanken CMS-7s microphone, CMS-MBB (I or II) power supply and matrix box, GS-7 suspension with hand grip, WS-7 windscreens, WJ-7 windjammer, and four cables (SC-71, SC-72, and two SC-73s).

• Dimensions: H=345mm (13.6 in.), W=435mm (17.1 in.), D=165mm (6.5 in.) • Weight: (including all products): 5.872kg (12.9 lbs., with CMS-MBB I); 5.922kg (13.0 lbs., with CMS-MBB II)

## WS-7s Windscreen

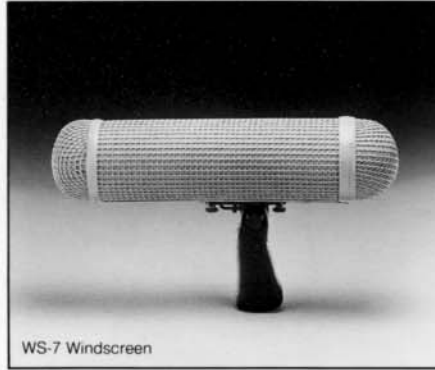


WS-7 Windscreen

The slotted WS-7s windscreen is specially designed for the GS-7s suspension with hand grip. (Note: The WS-7s can also be ordered in a Rycote-made version.)

• Dimensions: L=410mm (16.5 in.), D=103mm (4.1 in.)

## SC-71, SC-72, SC-73 Cable Assemblies

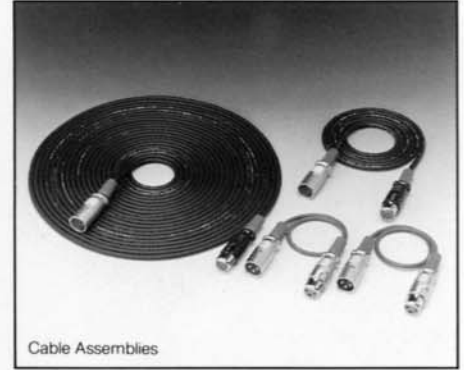

Cable Assemblies

The SC-71 (std. length: 1.5 m; 4.9 ft.), ideal for handheld use, and SC-72 (10m; 32.8 ft.), designed for boom-mounting, connect the CMS-7s to the CMS-MBB. The SC-73 (0.30m; 1 ft. x 2) connects the CMS-MBB to a tape recorder or mixing console.

## GS-7s Suspension with Hand Grip



GS-7 Suspension with Hand Grip

Custom designed for the Sanken CMS-7s microphone, the GS-7s features a shock absorbing material between the hand grip and microphone mount for maximum reduction of handling vibrations. Its drilled 10mm (3/8 in.) screw allows the CMS-7s to be mounted on a boom or stand. (Note: The GS-7s can also be ordered with hand grips made by Rycote.)

## WJ-7 Windjammer



WJ-7 Windjammer

The WJ-7 windjammer, which zip-fastens for snug and easy fitting, offers a 6dB improvement over other windscreens of the same type. (Note: The WJ-7 can also be ordered in a Rycote-made version.)

## SC-74 Matrix Console Connecting Cable



SC-74 Matrix Console Connecting Cable

The SC-74, which is used to edit M-S stereo recordings, allows the stereo outputs from a mixing console to be fed back into the CMS-MBB for generating L-R output. This also allows narrowing of the stereo image, if desired, as well as transforming the stereo signal to mono (see Application Notes).

Specifications for all accessories subject to change without notice.